






Use : Oscillator, H.F. amplifier
Verwendung : Oszillator, Hochfrequenzverstärker
Utilisation : Oscillateur, amplificateur H.F.
Gebruikswijze: Oscillator, hoogfrequentversterker
Empleo : Oscilador, amplificador de A.F.

Cathode : Indirectly heated
Kathode : Indirekt geheizt
Cathode : A chauffage indirect
Kathode : Indirect verhit
Cátodo : Caldeado indirectamente

Vf		=	6,3	V *
If		=	0,8	A *
Isat		≈	500	mA *)
Va		=	max. 400	V
Vg2		=	max. 250	V
Wa		=	max. 7,5	W *)
Wat		=	10	W *)
Wg2		=	max. 2,5	W *)
μglg2		=	7	
S (Ia = 30 mA)		≈	3	mA/V *)
Ik		=	max. 60	mA *)
Caf		=	3,8	pF *)
Cfg1		≈	7,5	pF *)
Cag1		≈	0,05	pF *)
Vk-f		=	max. 100	V

*) per unit - jede Einheit - chaque unité - per eenheid - cada unidad




36451



Characteristics :
 Kennlinien :
 Caractéristiques :
 Karakteristieken :
 Características :


Ia-Va; Ig2-Va

per unit - jede Einheit - chaque unité - per eenheid - cada unidad

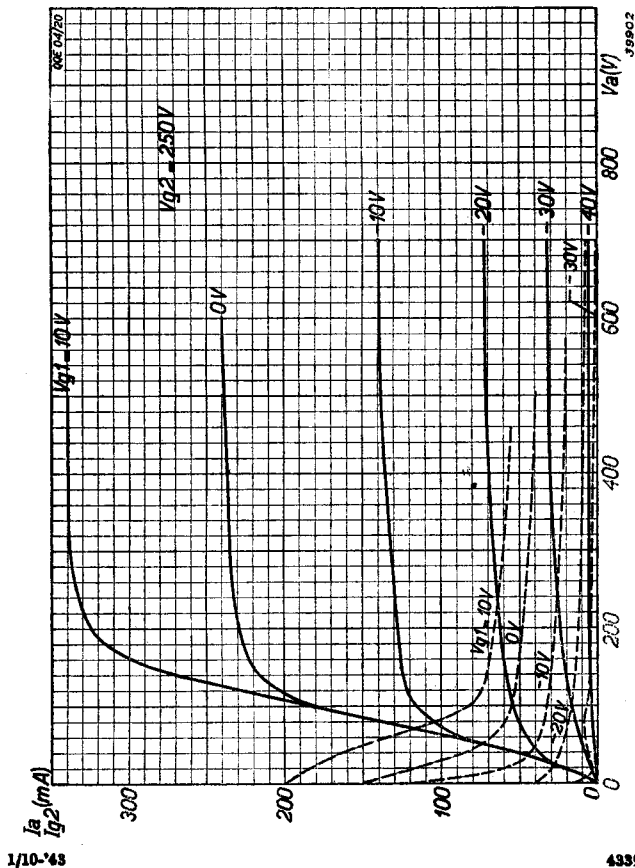



Characteristics :
 Kennlinien :
 Caractéristiques :
 Karakteristieken :
 Características : } $I_a - V_{g1}; I_{g2} - V_{g1}$

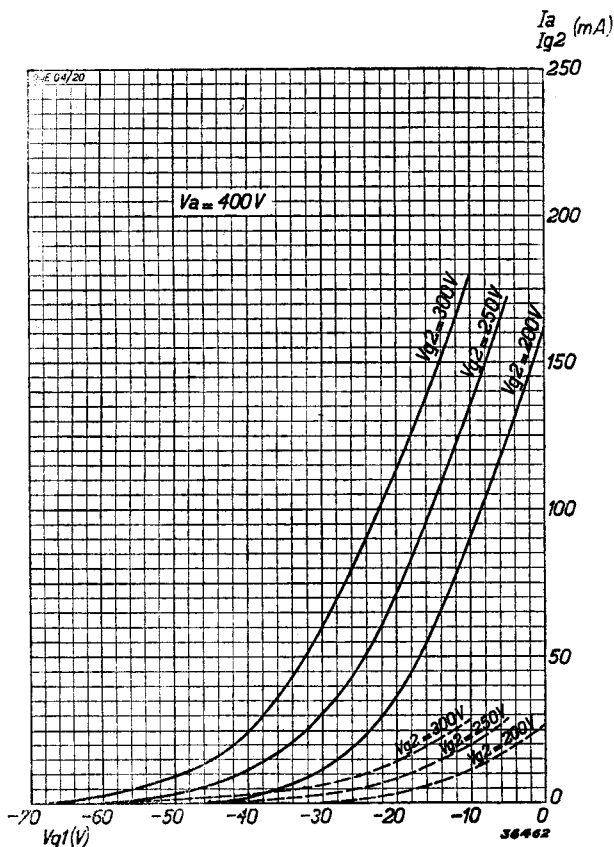



Characteristics : H.F. class C telegraphy (self excited, two valves)
 Kennlinien : H.F. Klasse C Telegraphie (selbsterregt. zwei Röhren)
 Caractéristiques : H.F. classe C télégraphie (auto-excité, deux tubes)
 Karakteristieken: H.F. klasse C telegrafie (zelf-geëxciteerd, twee buizen)
 Características : A.F. clase C telegrafia (autoexcitado, dos válvulas)

$\lambda < 10 \text{ m}$

